

PLUTON AIR

SEMI-AUTOMATIC BANDSAW H34

PLUTON AIR

Packaging
Box/cage

STANDARD EQUIPMENTS

VHZ Blade rotation by inverter
RPM1 Vice pressure control
NB1 BOX 1-nozzle sprayer - Supplied with 5 kg of Nebula Oil

STANDARD LINE VOLTAGE
400V/50Hz/3Ph
AVAILABLE LINE VOLTAGES
230V/50Hz/3Ph
220V/60Hz/3Ph
440V/60Hz/3Ph



OPTIONAL

Blade rotation sensor + Stress Detector
Laser lighting for cutting line
Rullo pneumatico Pluton
Suction system predisposition
2-nozzle sprayer - Supplied with 5 kg of Nebula Oil
Console control panel - 2,5 m long cable
Cycle start with pedal
M42 bimetallic bandsaw blade

REF.
SENS+SD
LX
RPP
PIAP
NB2 BOX
QEL SMART
ACP
5600x34x1,1


ROLLER TABLE 1300 mm wide roller - Load 500 kg/m (h min 870 mm / h max 930 mm)

Roller table 2 m
Roller table 2 m with PVC covered rollers

RFPL2
RFPL2 PVC

LENGTH STOPS WITH ARTICULATED STRIKER

Length stop 1 m	FM1RS PL
Length stop 2 m	FM2RS PL
Length stop 3 m	FM3RS PL
Length stop 4 m	FM4RS PL
Length stop 5 m	FM5RS PL
Length stop 6 m	FM6RS PL
Length stop 8 m	FM8RS PL

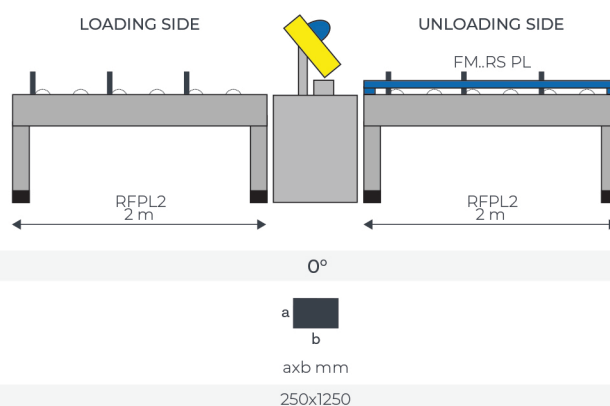

						
5600x34x1,1 mm	40÷160 mm	3,0 kW	0,36 kW	1392 kg	1,15x2,8x1,9 m a x b x c	890±10 mm